



01 产品主要特性
General Characteristics

- 全球通用输入范围 85~265Vac
 - 3000Vac 隔离耐压
 - 主动式 PFC 功能
 - 带有 DC_OK 触点功能
 - 工作温度 -25℃~+70℃
 - EMC 符合 EN55032
- Universal Input 85~265Vac
 - I/O-Isolation 3000Vac
 - Active PFC functionality
 - DC_OK Contact
 - Operating Temperature: -25℃ ~+70℃
 - EMC Meets requirements of Standard EN55032

02 产品选型表
Model Selection Guide


型号 Product Model	输入电压范围 (标称值) Input Voltage Range (Typical)	输出电压 Output Voltage (Vdc)	输出电流 Output Current (A)	典型效率 Efficiency (%)
EPS75-D12W	85~265Vac (100~370Vdc)	12	6.25	87
EPS75-D24W		24	3.12	88
EPS75-D48W		48	1.56	89
EPS120-D12WF		12	10	87
EPS120-D24WF		24	5	88
EPS120-D48WF		48	2.5	89
EP240-D12WF		12	20	90
EP240-D24WF		24	10	92
EP240-D48WF		48	5	92
EPD240-D2424W		24	10	92

03 封装尺寸和管脚定义图
Outline Diagram And Pin Out

EP75W


定义 Pin Out	端子 XT200	端子 XT201
1	FG	-Vo
2	N	-Vo
3	L	+Vo
4	-	+Vo

EP120W

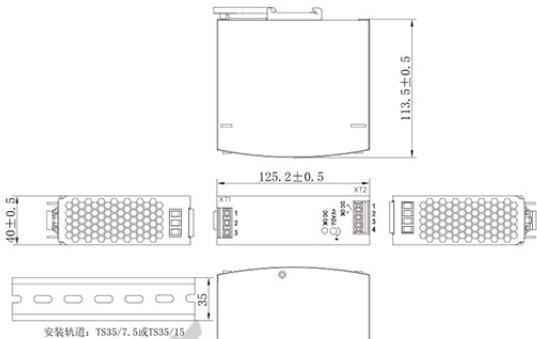

定义 Pin Out	端子 XT1	端子 XT2
1	FG	DC OK
2	N	DC OK
3	L	-Vo
4	-	+Vo

EP240 单路

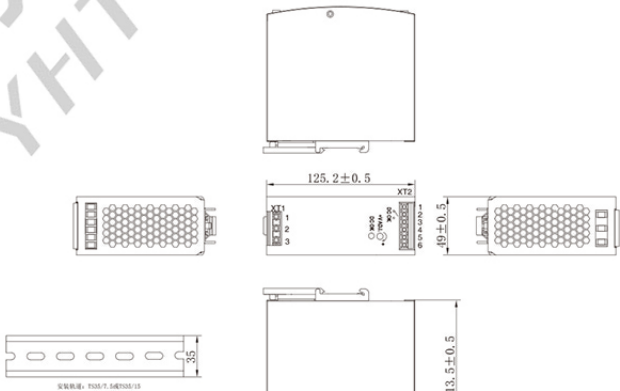

定义 Pin Out	端子 XT1	端子 XT2
1	FG	DC OK
2	N	DC OK
3	L	+Vo-
4	-	+Vo-
5	-	-Vo
6	-	-Vo

EP240W 双路

定义 Pin Out	端子 XT1	端子 XT2
1	FG	RS422-A
2	N	RS422-B
3	L	RS422-Y
4	-	RS422-Z
5	-	-Vo2
6	-	+Vo2
7	-	-Vo1
8	-	+Vo1

