



01

产品主要特性

General Characteristics

- 标准 6U 机框电源, 6HP
- 通用输入范围 90~264Vac
- 3000Vac 隔离耐压
- 输出短路保护、自恢复
- 符合 EN55032
- 6U standard chassis power supply, 6HP
- Universal Input 90~264Vac
- I/O-isolation 3000Vac
- Output Short-circuit Protection, Self recovery
- EMC Meets requirements of Standard EN55032

02

产品选型表


Model Selection Guide

型号 Product Model	输入电压范围 (标称值) Input Voltage Range (Typical)	输出电压 Output Voltage (Vdc)	输出电流 Output Current (A)	典型效率 Efficiency (%)
TCS80-05Y1	90~264Vac	5	16	80
TCQ100-051BY1	(90~373Vdc)	5, ± 15 , 24	10, ± 1 , 0.5	80

03

封装尺寸和管脚定义图


Outline Diagram And Pin Out

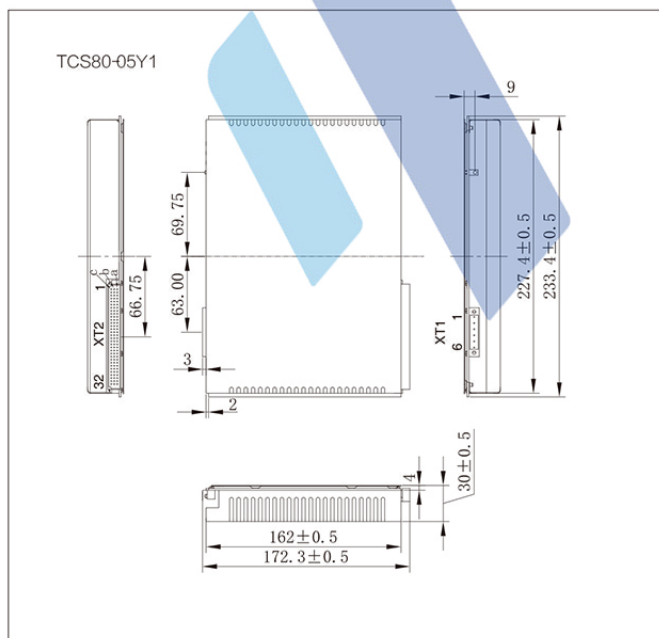

TCS80-05Y1

输入端子 XT1 Input	输出端子 XT2 Output		
1 L / DC+	a	b	c
2 NC	1-24	NC	NC
3 N / DC-	25-28	DGND	DGND
4 NC	29-32	+5V	+5V
5 FG			
6 NC			
菲尼克斯 MSTB2.5/6-GF-5.08 或同规格其他品牌端子	HAR-TING 09031966921 或同规格其他品牌端子		

TCQ100-051BY1

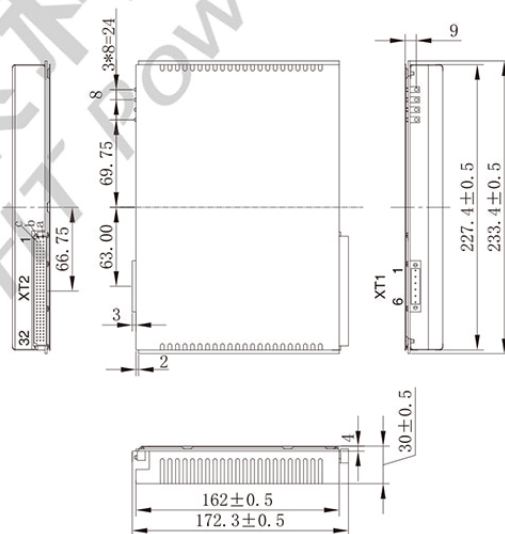

TCQ100-051BY1

输入端子 XT1 Input	输出端子 XT2 Output		
1 L / DC+	a	b	c
2 NC	1,2	+24V	+24V
3 N / DC-	3,4	COM	COM
4 NC	5-8	NC	NC
5 FG	9,10	+15V	+15V
6 NC	11,12	AGND	AGND
	13,14	-15V	-15V
	15-24	NC	NC
	25-28	DGND	DGND
	29-32	+5V	+5V
菲尼克斯 MSTB2.5/6-GF-5.08 或同规格其他品牌端子	HAR-TING 09031966921 或同规格其他品牌端子		