



01

产品主要特性

General Characteristics

- 宽输入范围 85~305Vac@YB5
- 4000Vac 隔离耐压 @YB5、YB10
- 工作壳温 -40℃~+95℃
- 输出短路保护、自恢复
- EMC 符合 EN55032
- Wide Input 85~305Vac@YB5
- I/O-isolation 4000Vac@YB5、YB10
- Case Temperature: -40℃ ~+95℃
- Output Short-circuit Protection, Self recovery
- EMC Meets requirements of Standard EN55032


02

产品选型表


Model Selection Guide

型号 Product Model	输入电压范围 (标称值) Input Voltage Range (Typical)	输出电压 Output Voltage (Vdc)	输出电流 Output Current (A)	典型效率 Efficiency (%)
YBS5-3B	85~305Vac (100~430Vdc)	3.3	1.25	74
YBS5-5B		5	1	78
YBS5-9B		9	0.55	78
YBS5-12B		12	0.42	80
YBS5-15B		15	0.33	82
YBS5-24B		24	0.23	83
YBS10-3W	85~265Vac (100~375Vdc)	3.3	2	71
YBS10-5W		5	2	80
YBS10-12W		12	0.83	81
YBS10-15W		15	0.67	82
YBS10-24W		24	0.42	83
YBS15-3W		3.3	3	74
YBS15-5W		5	3	76
YBS15-12W		12	1.25	80
YBS15-15W		15	1	81
YBS15-24W		24	0.63	82
YBS20-3W		3.3	4	77
YBS20-5W		5	4	80
YBS20-12W		12	1.67	82
YBS20-15W		15	1.33	83
YBS20-24W		24	0.83	85
YBS5-12V5NP	165~265Vac (200~375Vdc)	12.5	0.4	70

YB5

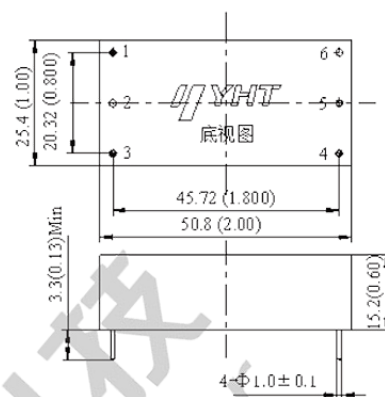

YB10-20

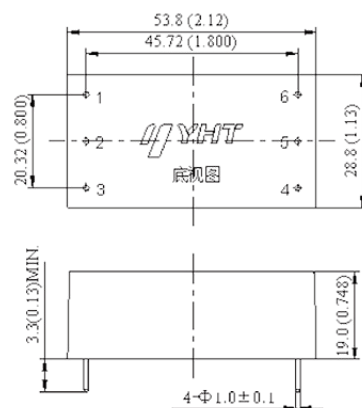

YB15 YB20 系列高度为 23.5mm
The Height of YB15 YB20 Series are 23.5mm